

MI 00 801

MI 00 801 is a rigid, semi-metal, molded friction material. It is composed basically of resins and rubber as link system with frictional modifier agents, mineral fibres and fine copper shavings to enhance its strength. They help to establish the friction value by conducting heat from the operating surface. It has a very stable friction coefficient with low wear and excellent resistance to fading

Dati Tecnici / Technical Data

Friction properties (according graphics)

Static Friction Coefficient (15bar, from box):	0.35±0.05	μ
Static Friction Coefficient (15bar, 100°C):	0.40±0.05	μ
Dynamic Friction Coefficient:	see charts	
Wear Rate:	see charts	
T° Fading:	>350	°C

Physical properties

Hardness (DIN53505):	80±5	Shore-D
Specific Gravity (ASTM D792):	2.10±0.05	gr/cm3
Thermal Conductivity (ASTM E1952):	0.54±0.01	W/m²K

Mechanical properties





Tensile Strength (ASTM D638):	15±5	N/mm²
Compressive Strength (ISO 844:2014):	126±5	N/mm²
Poisson Coefficient (ASTM D638):	0.24±0.03	
Young Modulus (ASTM D638):	5381±100	N/mm²

Recommended Working Values

T° Max. Continuous Operation:	350	°C
T° Max. Intermittent Operation:	400	°C

Others

Recommended Mating Surface:	Perlitic cast iron, hardness HB150-200
Recommended Adhesives:	Thermosetting adhesive

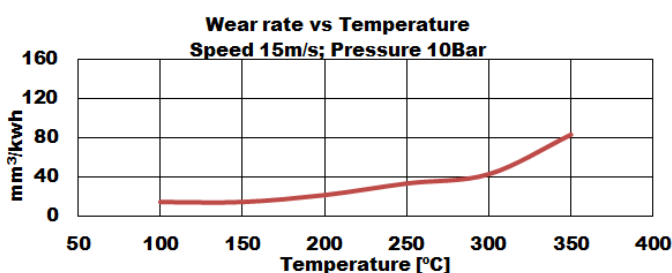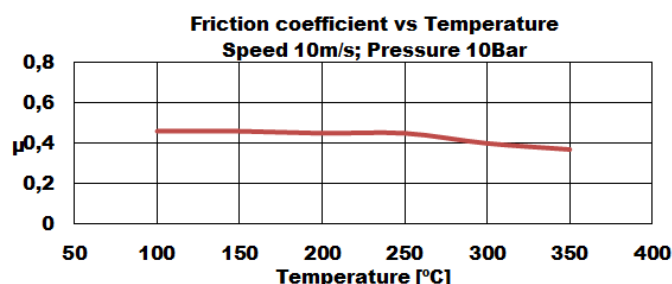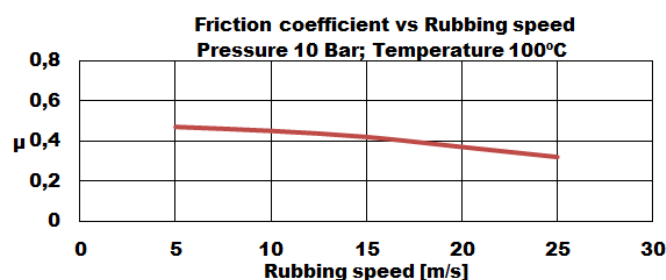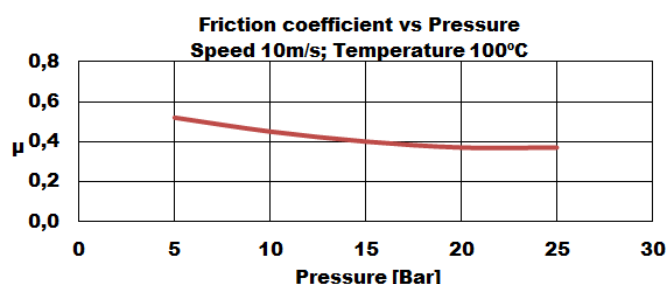

Rubbing speed, temperature and pressure are related. Changing any values will change other. The values shown represent typical conditions, but are not ultimate limits of the material.